

MURAL CLUB

gerflor.com



NEW


Gerflor[®]
the flooring group

MURAL CLUB



B-s2,d0

PUR

 100% recyclable



0003 Sand



0006 Grey




0001 White



0007 Blue



0004 Green

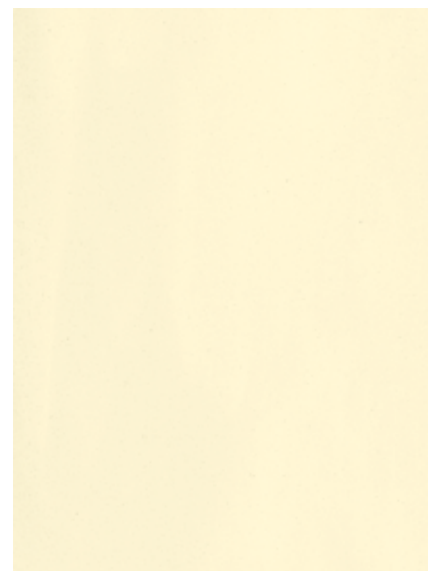


0005 Yellow

MURAL CLUB



TECHNICAL PERFORMANCES

- Resistance to tearing
- Fire classification according to EN 13501: **B-s2,d0**



HYGIENE

- Smooth and washable surface
- No particle emission
- Reduces hospital acquired infections compliant with ISO 22196, inhibits growth of bacteria
- Good resistance to staining thanks to **new PUR surface treatment**



AESTHETICS

- Slightly marbled design in 6 soft colours
- Colours matching the Gerflor ranges especially the Mipolam ranges




INSTALLATION

- Horizontal or vertical installation (2m width)
- Coloured backing for a perfect welding aspect
- A complete range of accessories for a durable and easy installation



ECO-FRIENDLY

- 100% recyclable
- Contains recycled production wastes
- Raw materials 100% compliant with Reach

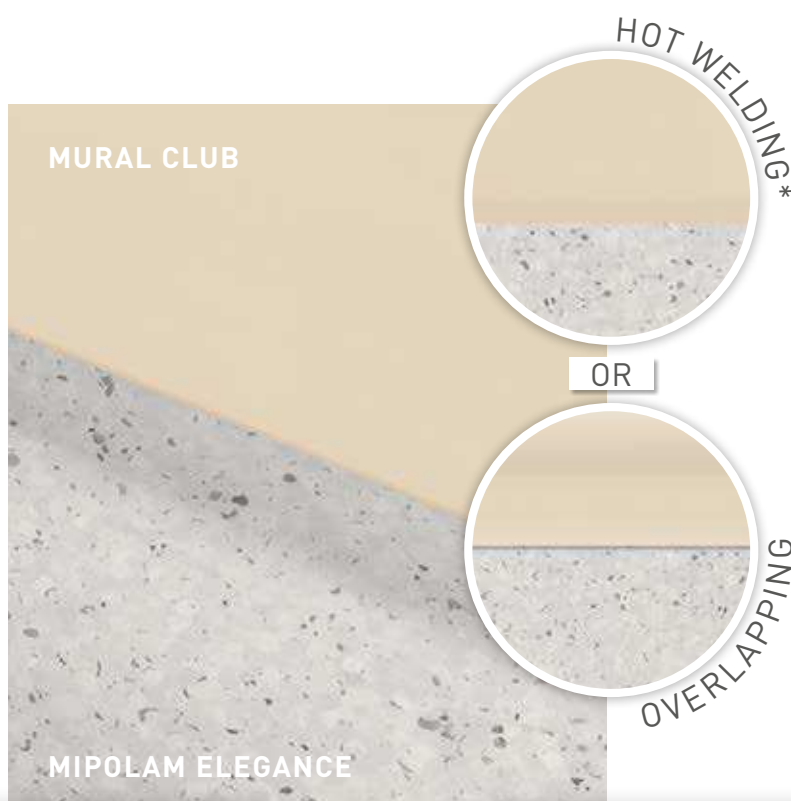

100% WATERTIGHTNESS

- ▶ **NO CONTAMINATION** areas between floor and wall protection
- ▶ **HOT WELDED*** for perfect sealing avoiding bacteria development

100% CLEAN

- ▶ Open angles for **PERFECT CLEANING** (mechanical and manual)

Information on accessories offer available on gerflor.com

*Providing that the Gerflor installation instructions are respected. Available on gerflor.com

MURAL CLUB

gerflor.com

MURAL CLUB is a homogeneous wall covering in 2m width roll and with a **B-s2,d0** fire classification. It is designed to be a permanent wall covering.

It is hot welded with CR40 welding rods for better hygiene.

It is made of calendered layer with colour throughout the whole thickness for a nicer aspect of the welding. This layer comprises at least 10% of recycled products. It does not contain any CMR 1 & 2 component and is 100% compliant with REACH. It is 100% recyclable.

MURAL CLUB benefits from a **PUR surface treatment** which provided good resistance to chemical products and makes maintenance easier.

Full resistant to impact, it acts as a buffer against damage from beds, trolleys and indoor motorized vehicles and other transportation systems.

MURAL CLUB is fully impact resistant and is therefore ideal for use as a cladding in large public buildings such as hospitals care institutions dental and veterinary surgeries, clean rooms, stores and supermarkets, warehouse and storage areas.

MURAL CLUB

DESCRIPTION / BESCHREIBUNG / DESCRIPTION / BESCHRIJVING / DESCRIPCIÓN / DESCRIÇÃO / DESCRIZIONE

| | | | |
|---|--------------------------|------------------|----------|
| Total thickness / <i>Gesamtdicke</i> / Epaisseur totale / <i>Totale dikte</i> / Espesor total / <i>Espessura total</i> / Spessore totale | EN ISO 24346 (EN 428) | mm | 1.0 |
| Thickness of wearlayer / <i>Dicke Nutzschrift</i> / Epaisseur couche d'usure / <i>Dikte van de slijtlaag</i> / Espesor capa de uso / <i>Espessura camada de desgaste</i> / Spessore strato di usura | EN ISO 24340 (EN 429) | mm | 1.0 |
| Weight / <i>Flächengewicht</i> / Poids / <i>Gewicht</i> / Peso / <i>Peso</i> / Peso | EN ISO 23997 (EN 430) | g/m ² | 1780 |
| Width/length of sheet / <i>Bahnenbreite/-länge</i> / Largeur/longueur des lés / <i>Rollbreedte/Rollegte</i> / Ancho/largo de rollos / <i>Largura/comprimento dos rolos</i> / Larghezza/lunghezza dei teli | EN ISO 24341 (EN 426) | cm / ml | 200 / 30 |

CLASSIFICATION / KLASSIFIZIERUNG / CLASSIFICATION / CLASSIFICATIE / CLASIFICACIONES / CLASSIFICAÇÕES / CLASSIFICAZIONI

| | | | |
|--|-------------|-------|-----------|
| Norm/product specification / <i>Produkt Norm</i> / Norme produit / <i>Technische eigenschappen</i> / Normas / <i>Normas</i> / Norma prodotto | - | - | EN 15 102 |
| Fire rating / <i>Brandverhalten</i> / Classement feu / <i>Brand classificatie</i> / Fuego / <i>Fogo</i> / Reazione al fuoco | EN 13 501-1 | class | B-s2,d0 |

PERFORMANCES / TECHNISCHE EIGENSCHAFEN / PERFORMANCES / TESTRESULTAAT / CUALIDADES TÉCNICAS / PERFORMANCES / CARATTERISTICHE TECNICHE

| | | | |
|---|--------------------------|--------|---|
| Colour fastness / <i>Lichtechtheit</i> / Solidité lumière / <i>Lichtechtheid</i> / Resistencia a la luz / <i>Estabilidade das cores</i> / Solidità alla luce | EN 20 105 - B02 | degree | ≥ 6 |
| Surface treatment / <i>Oberflächenvergütung</i> / Traitement de surface / <i>Oppervlaktebehandeling</i> / Tratamiento de superficie / <i>Tratamento de superficie</i> / Trattamento di superficie | - | - | PUR |
| Chemical resistance / <i>Verhalten gegenüber Chemikalien</i> / Résistance aux produits chimiques / <i>Chemische bestendigheid</i> / Resistencia a los productos químicos / <i>Resistência aos produtos químicos</i> / Resistenza ai prodotti chimici | EN ISO 26987 (EN 423) | - | OK |
| Anti-bacterial activity (E. coli - S. aureus - MRSA) / <i>Antibakterielle Aktivität (E. coli - S. aureus - MRSA)</i> / Activité anti-bactérienne (E. coli - S. aureus - MRSA) / <i>Antibacteriële activiteiten (E. coli - S. aureus - MRSA)</i> / Actividad antibacteriana (E. coli - S. aureus - MRSA) / <i>Atividade antibacteriana (E. coli - S. aureus - MRSA)</i> / Azione antibatterica (E. coli - S. aureus - MRSA) ⁽¹⁾ | ISO 22196 | - | > 99% inhibits growth / > 99% <i>Wachstumshemmend</i> / > 99% ne favorise pas la prolifération / > 99% <i>remt de groei van bacteriën</i> / > 99% inhibe el crecimiento / > 99% <i>inibe o desenvolvimento</i> / > 99% inibisce la crescita |

CE MARKING / CE KENNZEICHNUNG / MARQUAGE CE / EG-CONFORMITEITSMERK / MARCA DE CONFORMIDAD CE / MARCA DE CONFORMIDADE CE / MARCATURA CE DI CONFORMITA

| | | | |
|--|-----------|---|----|
|  | EN 15 102 | - | OK |
|--|-----------|---|----|

(1) The implementation of an effective cleaning regime is the most important defence against infection.

Gerflor Don't forget our complementary ranges!



Gerflor Be connected!



www.gerflor.com

#Gerflor



Gerflor
theflooringroup